IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:

Raymond Allan Pickup

Serial No.: 10/764,254

Filing Date: January 23, 200

Title: Tool for Applying Clips

MAIL STOP ISSUE FEE
Honorable Commissioner for Patents

P.O. Box 1450 Alexandria, VA 22313-1450 Group Art Unit: 3725

Examiner: Crane, Daniel C.

Attny. Docket No. 075200.0101

Client Ref.: RG-79US

CERTIFICATE OF MAILING VIA EXPRESS MAIL

Pursuant to 37 C.F.R. 1.10, I hereby certify that I have information and a reasonable basis for belief that this correspondence is being deposited with the United States Postal Service as Express Mail, Post Office to Addressee on the date indicated below and is addressed to:

MAIL STOP ISSUE FEE

HONORABLE COMMISSIONER FOR PATENTS

P.O. Box 1450

ALEXANDRIA, VA 22313-1450

CYNTHIA POSER

DATE OF MAILING:

JULY 20, 2005

EXPRESS MAIL LABEL: EV590026020US

SUBMISSION OF PRIORITY DOCUMENT

Dear Sir:

We enclose herewith a certified copy of United Kingdom patent application GB 0117966.2 which is the priority document for the above-referenced patent application.

Respectfully submitted,

BAKER BOTTS L.L.P. 023640

Paul R Morido

Reg. No. 35,960

Baker Botts, L.L.P.

One Shell Plaza

910 Louisiana Street

Houston, TX 77002-4995 Telephone: 713.229.1732

Facsimile: 713.229.7732

EMail: Paul.Morico@bakerbotts.com ATTORNEY FOR APPLICANTS

DATE: July 20, 2005







The Patent Office Concept House Cardiff Road Newport South Wales NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the omptroller-General, hereby certify that annexed hereto is a true copy of the documents as ignally filed in connection with the patent application identified therein.

In cordance with the Patents (Companies Re-registration) Rules 1982, if a company named in the ertificate and any accompanying documents has re-registered under the Companies Act 198 with the same name as that with which it was registered immediately before re-registration save at the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and a accompanying documents shall be treated as references to the name with which it is so re-registration.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. of LC.

Re-registre in under the Companies Act does not constitute a new legal entity but merely subjects the impany to certain additional company law rules.

CERTIFIED COPY OF PRIORITY DOCUMENT


William Morell

Signed

Dated 29 June 2005



Paten ___ct 1977 (Rule 16)



24JP-01 E647515-1 505940 P01/7700 0.00-0117966.2

Request for grant of a patent

8. Is a statement of inventorship and of right

c) any named applicant is a corporate body

this request? (Answer 'Yes' if:

applicant, or

See note (d))

to grant of a patent required in support of

a) any applicant named in part 3 is not an inventor, orb) there is an inventor who is not named as an

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road Newport South Wales NP9 1RH

RG-79GB 1. Your reference 2. Patent application number 0117966.2 24 JUL 2001 (The Patent Office will fill in this part) 3. Full name, address and postcode of the or of J & H ROSENHEIM LIMITED LANCASTER FIELDS each applicant (underline all surnames) **GATEWAY** CREWE CHESHIRE CW1 6FF Patents ADP number (if you know it) UNITED KINGDOM If the applicant is a corporate body, give the country/state of its incorporation **CLOSURE TOOL** 4. Title of invention **Ronald GRAVES** 5. Name of your agent (if you have one) 24 FITZWILLIAM AVENUE "Address for service" in the United Kingdom SUTTON to which all correspondence should be sent **MACCLESFIELD** (including the postcode) **CHESHIRE SK11 0EJ** 424557700 4245577002 Patents ADP number (if you know it) Date of filing Country Priority application number 6. If you are declaring priority from one or more (if you know it) (day / month / year) earlier patent applications, give the country and the date of filing of the or each of these earlier applications and (if you know it) the or each application number Number of earlier application Date of filing 7. If this application is divided or otherwise (day / month / year) derived from an earlier UK application, give the number and the filing date of the earlier application

YES

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document 0 Continuation sheets of this form Description 2 Claim(s) 0 Abstract 2; Drawing(s) 10. If you are also filing any of the following, state how many against each item. 0 Priority documents n Translations of priority documents Statement of inventorship and right to grant of a patent (Patents Form 7/77) Request for preliminary examination 0

I/We request the grant of a patent on the basis of this application

Signature

0

0

Ronald GRAVES

01260 252653

person to contact in the United Kingdom

12. Name and daytime telephone number of

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

11.

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write you answers in capital letters using black ink or you may type them.

and search (Patents Form 9/77)

(Patents Form 10/77)

(please specify)

Any other documents

Request for substantive examination

- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

Date: 23/07/2001

CLOSURE TOOL

This invention relates to closure tools, and in particular to tools for closing heavy-duty clips as used for example in the building trade and in agriculture.

It is known to use a closure tool for closing heavy duty clips to fasten together sections of mesh and the like as used in the building trade and in agriculture, for constructing animal cages, enclosures or the like, or in constructing fences on farms, building sites or the like. Such tools usually consist of a magazine for an assembly of clips and a jaw arrangement to which the clips are fed singly in sequence. The jaws are moved pneumatically to force the clip that has been introduced between them into a closed configuration around the wires of the mesh, thereby securing two sections of mesh together. Alternatively, the jaws may be moved by hydraulic or electrical power. Such tools are useful in locations having an accessible source of air, hydraulic or electrical power. However, it is often required to use install such clips in locations remote from sources of such power, and the use of portable sources of power is cumbersome and inconvenient. Hand tools for performing various functions are known. In such cases, where considerable effort is required to perform the function, either very long handles or a system of levers is employed to make the applied forces required within the capabilities of a person performing the function, e.g. long handled shears, tree loppers and the like. Such tools may still require considerable effort by the user unless the tool is large and heavy, in which case the tools are unwieldy to transport and in use. In addition, such tools can be difficult to control to effect a function such as clip closure accurately.

It is an object of the present invention to provide a closure tool that is useable in locations that do not have a source of pneumatic, hydraulic or electrical power readily available. It is a further object of the invention to provide a closure tool that is convenient to use and provides accurate control of the function for which the tool is to be used.

The invention provides a closure tool having a body, at least one handle movably mounted therein and a pair of anvils movable relative to each other from a spaced position to closure position in response to relative movement of the at least one handle and the body, wherein a first gear member is connected to the at least one handle and movable therewith, a second gear member is engaged by the first gear member and movable therewith, and at least one of the anvils is connected to the second gear member to be movable therewith.

The anvils may have co-operating formations thereon providing a closing chamber for a clip when the anvils are in the spaced disposition. The closing chamber may be substantially circular when the anvils are in the closure position. The at least one handle may be pivotally mounted in the body. The first gear member may comprise a circular gear wheel and may comprise a sector thereof. The second gear member may comprise a rack slidably mounted in the body. The at least one anvil may be an end part of the second gear member. The other anvil may be secured to the body.

The closure tool may comprise a pair of handles movably mounted in the body and a pair of anvils movable relative to each other from a spaced position to closure position in response to relative movement of the handles. Each handle may be connected to a respective first gear member. In this case, each handle may be pivotally mounted in the body. The second gear member may be engaged by each first gear member, which may have gear formations on opposed sides thereof, each gear formation being engaged by a respective first gear member.

The closure tool may have a magazine adapted to receive a plurality of clips. The magazine may be mounted on the body whereby an outlet end of the magazine is disposed adjacent the closing chamber. The magazine may comprise a spring device adapted in use of the closure tool to force a plurality of clips towards the outlet end of the magazine. The at least one anvil may have a severing edge thereon adapted to sever a leading clip adjacent the outlet end of the magazine from a plurality of clips received in the magazine and move the leading clip into the closing chamber. The magazine may be arcuate. The closure tool may be of aluminium.

The invention will now be described with reference to the accompanying drawings in which:

- Fig. 1 is a front view of a closure tool,
- Fig. 2 is a side view of the closure tool of Fig. 1, and
- Fig. 3 is a perspective view to an enlarged scale of a clip for use in the closure tool of Figs. 1 and 2.

Referring now to the Figures, there is shown a closure tool 10 for closing heavy duty clips 11 to fasten together wires or sections of mesh 12 and the like as used in the building trade and in agriculture. The closure tool 10 consists of a body 13, including a top plate 13a on which two handles 14 are mounted on pivots 15. Attached to or integral with each handle 14 is a first gear member 16 in the form of a sector of a circular gear wheel. The centre of curvature of each first gear member 16 is the respective pivot 15. Intermeshing with the two first gear members 16 is a second gear member 17 in the form of a double-sided rack. Attached to or integral with the second gear member 17 is a first anvil 18. The first anvil 18 and the second

gear member 17 are guided by two side plates 19 to move along a linear path when the handles 14 are moved towards each other or away from each other. Attached to or integral with the body 13 is a second anvil 20. Also mounted on the body 13 is a curved magazine 21 for storing an assembly of clips 11 for use by the closure tool 10. The body 13, handles 14, first and second gear members 16, 17 and magazine 21 are of aluminium to minimise the weight of the closing tool 10.

In use, operation of the closure tool 10 is as follows. The handles 14 are moved away from each other so that the anvils 18, 20 are spaced apart. An assembly of clips 11 is placed in the magazine 21. The clips 11 are temporarily secured to each other in side-by-side disposition by a tape 22 (shown in dashed lines in Fig. 3). Each clip 11 is formed into a U-shape and is formed with a tongue 23 at one end and a correspondingly shaped cut-out 24 at the other end. The assembly of clips 11 is forced by a spring 25 towards the outlet end 26 of the magazine 21 so that the leading clip 11 is disposed adjacent a closing chamber 27 formed between the first anvil 18 and the second anvil 20. The closure tool 10 is placed so that the wires, mesh or the like 12 to be secured together pass through the closing chamber 27. The handles 14 are then moved towards each other, causing rotation of the first gear members 16 about the pivots 15. This in turn causes the second gear member 17 with the first anvil 18 to move relative to the body 13 and the second anvil 20. A severing edge 28 formed on the first anvil 18 cuts the tape 22 to allow the leading clip 11 to move properly into the closing chamber 27 and around the wires 12. Movement of the first anvil 18 towards the second anvil 20 progressively reduces the longitudinal extent of the closing chamber 27. The opposed surfaces of the closing chamber 27 in the first and second anvils 18, 20 are of circular form so that the ends 23, 24 of the clip 11 are forced towards each other. The clip 11 eventually is formed substantially into a circular shape surrounding the wires 12 with the tongue 23 received in the cut-out 24. The handles 14 are then moved away from each other and the closure tool 10 removed from the wires 12.

By means of the invention, a closure tool is provided that is convenient to use in any location that has no power source available. The closure tool of the invention is relatively compact and readily transportable. The rack and gear wheel arrangement provides that the operation of the closure tool is smoother and more controlled than with known arrangements using very long handles and/or lever mechanisms. Other embodiments of closure tool within the scope of the invention will be readily apparent to persons skilled in the art. For example, both anvils may be movable relative to the body and each other, with one handle geared to one anvil and the other handle geared to the other anvil. Alternatively, one handle may be secured to or integral with the body and one anvil, with the other handle movable relative thereto and

geared to the other, movable, anvil. As a further alternative, the movable anvil may be attached to a circular second gear so that it moves in an arcuate path towards the other anvil. In such a case, the movement of one handle relative to the body and the other handle may be linear. The closure tool may be made of any suitable material, such as a plastics material if such material is adequately strong for the intended use to which the tool is to be put. If preferred, the magazine may be dispensed with and the clips may be loaded into the closing chamber individually.

THIS PAINE DLAINE (USPTO)



- 1. A closure tool having a body, at least one handle movably mounted therein and a pair of anvils movable relative to each other from a spaced position to closure position in response to relative movement of the at least one handle and the body, wherein a first gear member is connected to the at least one handle and movable therewith, a second gear member is engaged by the first gear member and movable therewith, and at least one of the anvils is connected to the second gear member to be movable therewith.
- 2. A closure tool according to claim 1, wherein the anvils have co-operating formations thereon providing a closing chamber for a clip when the anvils are in the spaced disposition.
- 3. A closure tool according to claim 2, wherein the closing chamber is substantially circular when the anvils are in the closure position.
- 4. A closure tool according to any one of claims 1 to 3, wherein the at least one handle is pivotally mounted in the body.
- 5. A closure tool according to claim 4, wherein the first gear member comprises a circular gear wheel.
- 6. A closure tool according to claim 5, wherein the first gear member comprises a sector of a circular gear wheel.
- 7. A closure tool according to claim 5 or claim 6, wherein the second gear member comprises a rack slidably mounted in the body.
- 8. A closure tool according to any one of claims 1 to 7, wherein the at least one anvil is an end part of the second gear member.
- 9. A closure tool according to claim 8, wherein the other anvil is secured to the body.
- 10. A closure tool according to any one of claims 1 to 9, comprising a pair of handles movably mounted in the body and a pair of anvils movable relative to each other from a spaced position to closure position in response to relative movement of the handles.

- 11. A closure tool according to claim 10, wherein each handle is connected to a respective first gear member.
- 12. A closure tool according to claim 11, wherein each handle is pivotally mounted in the body.
- 13. A closure tool according to claim 12, wherein the second gear member is engaged by each first gear member.
- 14. A closure tool according to claim 13, wherein the second gear member has gear formations on opposed sides thereof, each gear formation being engaged by a respective first gear member.
- 15. A closure tool according to any one of claims 1 to 14, comprising a magazine adapted to receive a plurality of clips.
- 16. A closure tool according to claim 15, wherein the magazine is mounted on the body whereby an outlet end of the magazine is disposed adjacent the closing chamber.
- 17. A closure tool according to claim 16, wherein the magazine comprises a spring device adapted in use of the closure tool to force a plurality of clips towards the outlet end of the magazine.
- 18. A closure tool according to claim 16 or claim 17, wherein the at least one anvil has a severing edge thereon adapted to sever a leading clip adjacent the outlet end of the magazine from a plurality of clips received in the magazine and move the leading clip into the closing chamber.
- 19. A closure tool according to any one of claims 16 to 18, wherein the magazine is arcuate.
- 20. A closure tool according to any one of claims 1 to 19, made of aluminium.
- 21. A closure tool substantially as hereinbefore described with reference to and as illustrated in Figs. 1 and 2 of the accompanying drawings.

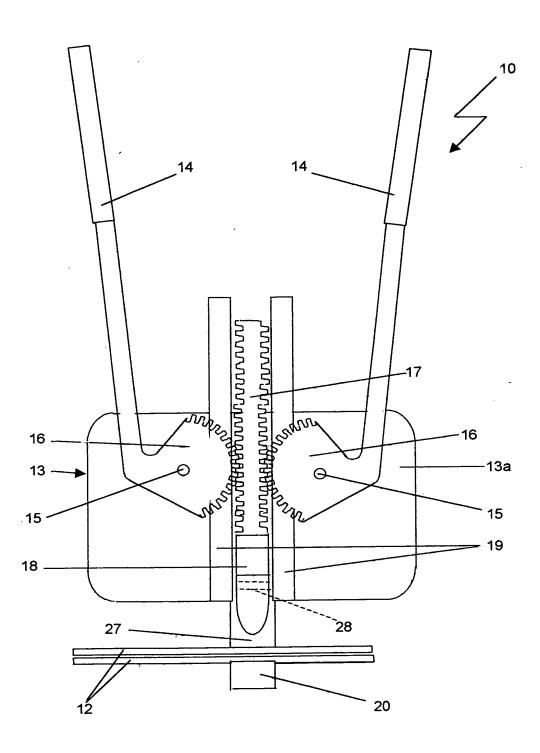


Fig. 1

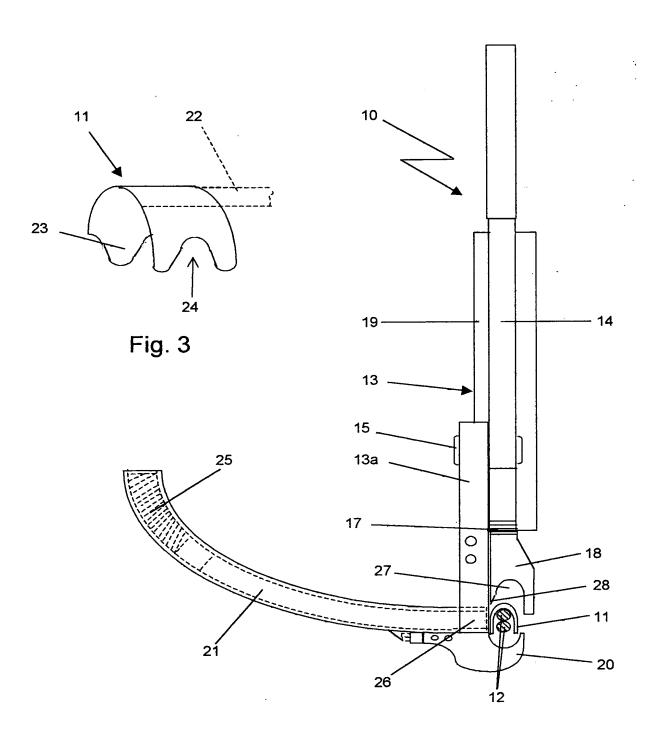


Fig. 2